



SENOX®

Step Lock™



Installs within the gutter without disturbing the shingles.



Securely installs without screws.



Low profile remains virtually unseen from the ground.



Small hole design prevents leaves and other debris from entering the gutter.



Handles heavy amounts of rainfall.



Powder coated finish provides slick snag free surface for deflecting leaves.

*Also Available
in Copper*



Serving the Seamless Gutter Industry Since 1972

Remove and Install for Maintenance as Needed




Clean and flush existing gutters and downspouts thoroughly with water prior to installing gutter guard.



1. Slip the back of the screen underneath the shingles so that it rests on top of the hidden gutter hangers



2. Push screen back and snap front lip in.

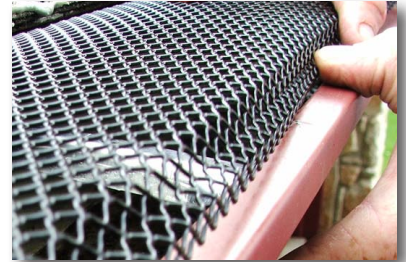

3. Snap the balance of the screen into place.



4. Push down screen after it is snapped in to ensure screen is fully expanded and lock into place.



5. Repeat with the next piece, overlapping each section to the full depth of the pre-cut notch.



6. For outside corners, cut a 45° angle off the opposite ends of two adjoining pieces. Slide under the shingles and push onto the gutter to form an accurate corner joint.

Gutter Guard is an integral part of a well functioning Rain Water Collection system.

KEEPS DEBRIS OUT SO SYSTEM WORKS PROPERLY



Reasons to Have a Rain Barrel at Home:

- Keeps water out of storm drains and combined sewer systems
- Controls moisture levels around the foundation of your home or property
- Provides oxygenated, un-chlorinated water to plants and flower beds
- Directs overflow to where you want it to be
- Reduces water and wastewater bills
- Conserves water in the summer months when demand is the highest

Go Green at www.senox.com